

# Product data sheet

## Characteristics

# 140CPU65150

Unity processor, Modicon Quantum automation platform, Modbus Plus, 768kB RAM, 166MHz



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Unity processor

### Complementary

Clock frequency	166 MHz
Number of slots	10 16 6 4 2
Number of racks	2 - local rack(s)
Number of distributed I/O station	63 station(s) - 1 rack(s) - 3 Modbus Plus network(s)
Number of remote I/O station	31 - 2 rack(s) per S908 remote I/O 31 - 2 rack(s) per ethernet Quantum remote I/O 16 - 2 rack(s) per ethernet X80 remote I/O
Discrete I/O number	31744 inputs, 31744 outputs - remote 8000 inputs, 8000 outputs - distributed - per network Modbus Plus Unlimited (26 slots max) - local Unlimited (31 drops of 28 slots max) - ethernet remote I/O
Analogue I/O number	500 inputs, 500 outputs - distributed - per network Modbus Plus 1984 inputs, 1984 outputs - S908 remote I/O Unlimited (26 slots max) - local Unlimited (31 drops of 28 slots max) - ethernet remote I/O
Application specific I/O	Accurate time stamping Serial link High-speed interrupt inputs Counter
Communication service	Ethernet router
Number of optional modules	6 (Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)
Maximum number of connections	1 USB 2 AS-Interface - distributed 4 AS-Interface - remote 6 Ethernet TCP/IP - local 6 Modbus Plus - local 6 Profibus DP - local 1 Modbus (RS232/485 Modbus/ASCII)
Integrated connection type	1 Modbus Plus with 1 Ethernet TCP/IP with 1 Modbus with 1 USB with
Checks	Process control
Memory description	Expandable 7168 kB - program with PCMCIA card Expandable 8 MB - file storage with PCMCIA card Internal RAM 768 kB

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Switch function	Key switch memory port on/off
Application structure	1 cyclic/periodic master task - 1 periodic fast task - 128 I/O interrupt tasks - 128 interrupt tasks - 32 timer interrupt tasks - 4 auxiliary tasks -
Number of instructions per ms	10.28 Kinst/ms 100 % Boolean 10.07 Kinst/ms 65 % Boolean and 35 % numerical
System overhead	0.2 Ms for fast task 1 Ms for master task
Bus current requirement	2160 MA
Local signalling	1 LED (green) for Ethernet activity (COM) 1 LED (red) for Ethernet collision
Electrical connection	1 female connector, connector type: SUB-D 9 for connecting to the Modbus Plus network 1 connector, connector type: RJ45 for connecting Ethernet network 1 connector, connector type: RJ45 for connecting Modbus bus

## Environment

Product certifications	Misc (Marine)[RETURN]UL[RETURN]CE[RETURN]CSA[RETURN]GOST
Standards	HazLoc

## Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.0 Cm
Package 1 Width	18.5 Cm
Package 1 Length	32.5 Cm
Package 1 Weight	1.434 Kg

## Contractual warranty

Warranty	18 months
----------	-----------

## Racks for Modules Mounting

### Dimensions of Modules and Racks

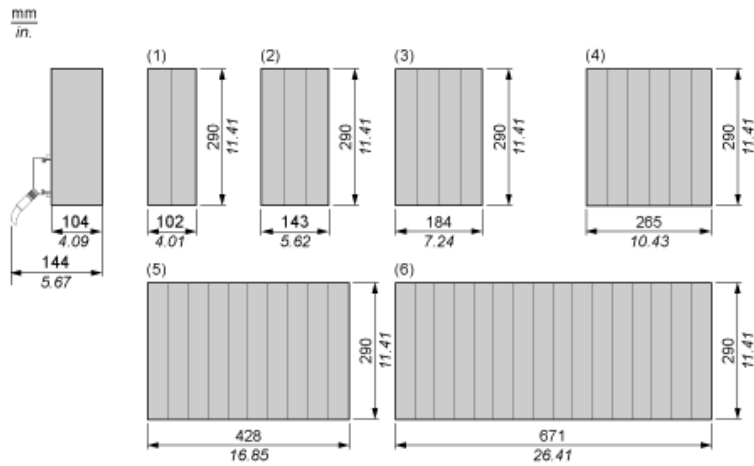

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots